October 2002



Sabine National Wildlife Refuge Erosion Protection (CS-18)

Project Status

Approved Date: 1991Cost:\$1.59 millionProject Area:13,000 acresStatus:CompletedNet Benefit After 20 Years:5.542 acresMarch 1995

Project Type: Shoreline Protection

Location

This project is located in the center of the Sabine National Wildlife Refuge, approximately 10 miles southwest of Hackberry in Cameron Parish, Louisiana. It is bordered to the north by Starks North Canal, to the east by Beach Canal, to the south by Starks Central Canal, and to the west by the Burton-Sutton Canal.

Problems

Pool 3 is a 27,000-acre freshwater marsh pool on the refuge that is hydrologically isolated and surrounded by tidally influenced brackish canals.

Because of the continual erosion created by boat traffic and weathering, the levee protecting Pool 3 from higher salinity water was in danger of breaching along the Burton-Sutton Canal.



Sabine National Wildlife Refuge Erosion Protection looking eastward across the Burton-Sutton Canal into Pool 3. The continuous rock breakwater is seen along the shoreline in the lower third of the photo.

Restoration Strategy

A 5.5 mile-long, continuous, free-standing rock dike was built along the east bank of the Burton-Sutton Canal and forms the western boundary of Pool 3.

Progress to Date

The project's effectiveness is being evaluated by shoreline movement surveys and by using a series of pre-construction and post-construction aerial photographs to evaluate changes in land-to-water ratios.

Shoreline survey results following the project's completion have shown that distances from survey markers to the edge of bank vegetation differed by less than 7.7 feet at any one station for both the project and reference areas. Between 1995 and 2000, shoreline advance was detected at almost all project stations and at four of the five reference stations. Mean shoreline advance rates were effectively equal: 1.3 feet per year for the project area and 0.9 feet per year for the reference sites.

Observations at the project site and data collected during the shoreline surveys demonstrate that the integrity of the west bank of Pool 3 has been maintained. The project has also been effective in preventing saltwater intrusion into Pool 3.

The levee appears to be stable, and the rock dike seems to be in good condition at this time. Future inspections of the project area will be conducted at regular intervals to document the condition of the rock breakwater and any required maintenance. This project is on Priority Project List 1.


For more project information, please contact:



Federal Sponsor: U.S. Fish and Wildlife Service Lafayette, LA (337) 291-3100



Local Sponsor: Louisiana Department of Natural Resources Baton Rouge, LA (225) 342-7308

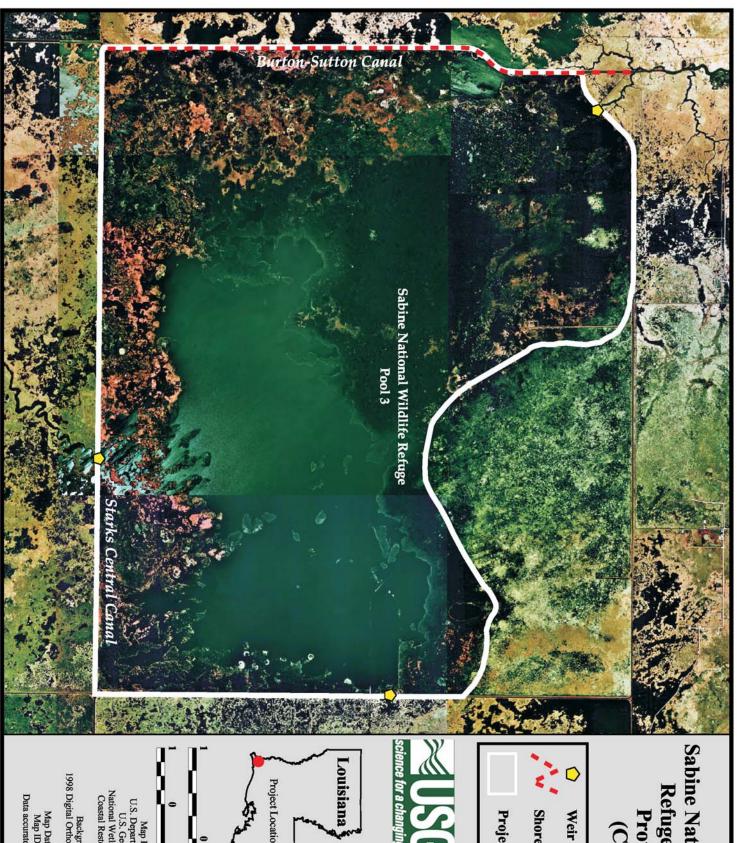

Sabine National Wildlife Refuge Erosion Protection (CS-18)

Shoreline Protection

Project Boundary





Background Imagery: 1998 Digital Orthophoto Quarter Quadrangle Map Produced By:
U.S. Department of the Interior
U.S. Geological Survey
National Wetlands Research Center
Coastal Restoration Field Station

Kilometers

Map Date: May 9, 2002 Map ID: 2002-11-713 Data accurate as of: May 9, 2002